


Legenda accesoriilor:

- A Presostat cu contor ore
- B Tamponi de cauciuc
- C Autocolant cu intervale service
- D Roti cu camera
- E Robinet evacuare condens 20mm
- F Stecher
- G Negru mat RAL 9005

MODEL	ACCESORII
AB90	D + F + G
AB200	A+B+C+E+G
AB300	A+B+C+E+G
AB500	A+B+C+E+G

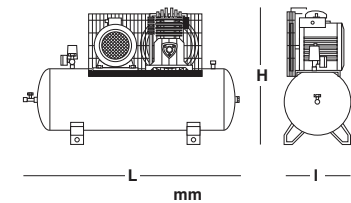

Tip	Volt/Hz												
		Lt.	dB (A)	Pompa	Cil./Timpi	ℓ/min	C.F.M.	m³/h	bar	psi	HP	kW	min-1
AB 90-415MC	230/50/1 ▲	90	74	AB 415	2/1	400	14.1	24	10	145	3	2.25	1000
AB 90-515TC	400/50/3 ■	90	75	AB 515	2/1	510	17.9	30	10	145	4	3	1280
AB 200-3 F	400/50/3 ■	200	74	AB 415	2/1	400	14.1	24	10	145	3	2.25	1000
AB 200-4 F	400/50/3 ■	200	75	AB 425	2/2	440	15.4	26,4	10	145	4	3	1280
NEW-AB300-5,5 F	400/50/3 ■	270	73	AB 678	2/2	600	21	36	10	145	5,5	4	900
NEW-AB500-7,5 F	400/50/3 ■	500	76	AB 998	2/2	840	29.7	50,4	10	145	7,5	5	1000

	L	I	H	kg	m³
AB 90-415MC	1100	530	860	86	0.393
AB 90-515TC	1100	530	860	124	0.393
AB 200-3 F	1460	460	1000	110	0.895
AB 200-4 F	1460	460	1000	150	0.895
NEW-AB300-5,5 F	1600	500	1040	160	1.242
NEW-AB500-7,5 F	1970	590	1300	260	1.920